

ACRYLIC POOL PAINT



- *Self-priming*
- *Strong UV protection*
- *Easy cleanup with soap and water*

Acrylic Pool Paint

Woolsey® Acrylic Pool Paint offers multiple advantages over traditional solvent-based paints. It can be applied to damp surfaces as well as previously painted chlorinated and synthetic rubber surfaces. Woolsey Acrylic Pool Paint is self priming and cleans up with soap and water.

This product allows the pool to be filled in as little as 3 days after the final application of paint. This product can be used when short down times are critical. Water-based acrylics are extremely colorfast and UV resistant.


TECHNICAL INFORMATION


FINISH: Matte
SOLIDS BY VOLUME: 35%
COVERAGE: 350 ft²/gal.
VOC: 250 grams/liter
APPLICATION METHOD: Brush, roller, airless or conventional spray
MAXIMUM ROLLER THICKNESS: 3/8"
NUMBER OF COATS: 2 minimum
WET FILM THICKNESS: 3.4 mils
DRY FILM THICKNESS: 1.2 mils
APPLICATION TEMP: 50°F Min / 90°F Max
DRY TIMES: OUTDOOR POOL:
3 days before filling
INDOOR POOL:
7-10 days before filling

NOTE: USE ADEQUATE VENTILATION

AVAILABLE IN THESE COLORS

Note: Color differences may occur between actual color chips shown.

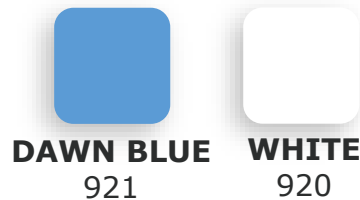

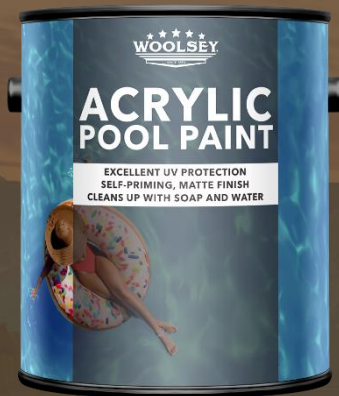

COATING PERFORMANCE, IN GENERAL, IS PROPORTIONAL TO THE DEGREE OF SURFACE PREPARATION. FOLLOW ALL RECOMMENDATIONS VERY CAREFULLY, AVOIDING ANY SHORTCUTS.

COMPATIBILITY: For compatibility purposes, the existing paint on previously painted surfaces of a pool should be determined before painting.

SURFACE REPAIRS AND JOINT/CRACK FILLER: Plaster or concrete surfaces should be tested for integrity and soundness. Aged plaster should be checked for integrity. Check for hollow or weak/crumbling plaster by using a ball-peen hammer or any other comparable method. Perform repairs before painting. Power wash to remove loose paint and dirt. Any minor repairs, such as patching with hydraulic cement or filling of cracks, should be done and allowed to cure prior to surface prep. We suggest using polyurethane sealant. Sealant must be top-coated before being submersed in chemically treated water.

SURFACE PREPARATION: Coating performance, in general, is proportional to the degree of surface preparation. Follow recommendations carefully, avoiding shortcuts. Inadequate preparation of surfaces will virtually assure inadequate coating performance. Use tri-sodium phosphate (TSP), sulfamic or muriatic acid solution and high-pressure (3500 PSI) minimum power washer. Scrub the entire pool surface with TSP solution to remove all dirt, oils and chalk. All surfaces should then be acid etched with 15-20% solution of sulfamic or muriatic acid to remove mineral deposits and to achieve a medium sandpaper grade finish on bare concrete or plaster surfaces. Neutralize/rinse with TSP and water. If surface is exceptionally hard, we recommend sanding with 60-80 grit sandpaper to create surface profile, prior to applying the first coat of Woolsey Acrylic Pool Paint. New concrete and plaster surfaces must be cured a minimum of 28 days prior to painting.

APPLICATION: Use no thicker than a 3/8" nap roller. DO NOT use rollers with cardboard cores. Apply at the recommended coverage rate. Ideal air temperatures for application are between 50°F and 90°F. Surface temperature should be at least 50°F, and no more than 90°F. Overnight drying temperatures MUST be at least 50°F. Do not paint when rain is imminent. Rain, moisture or excessively high humidity can cause blistering, color blushing and the finish could be adversely affected. If rain occurs during the drying process allow an extra day of dry time for each day of rain.

MIXING THE PAINT: This product is self priming; no other primer is recommended or should be used. Mechanically mix the paint to achieve uniform consistency and color. If more than one (1) gallon of paint is used at a time, box (intermix) several gallons together.

SPRAY INFORMATION: Airless: 2000-2500 PSI, Tip Size: .013 - .017 (0.33 – 0.43 mm) *Product can be thinned with potable water if necessary.*